

RM_MUT

COMPACT 4-WAY CASSETTE



Toshiba's 4-way cassette has been specifically designed for small commercial applications, where a compact and efficient unit is needed.

Design

- Elegant and flat appearance.
- Designed to fit within the T-bar of grid ceiling: 620mm X 620mm.

Comfort

- Individual setting of louver position: 3 different swing modes: standard, dual & cycle.
- 5 steps air flow.

Easy to install

- Compact and thin chassis, measuring just 256mm in height.
- Built-in high-lift drain pump.
- Lightweight unit, for easy and quick installation.

SCOP MAX



4.28

CAPACITY



2.5kW > 5.6kW

OPERATION



-20°C > +46°C


Occupancy sensor switches off automatically the unit if nobody is in the room to save energy.



R410A
with TOSHIBA

CE

EUROVENT
CERTIFIED
PERFORMANCE
www.eurovent-certification.com

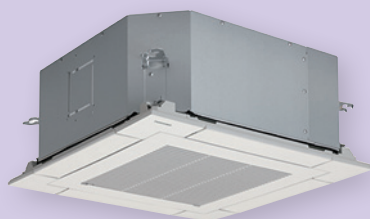

INDOOR UNITS

RAV-RM301MUT-E/TR
RAV-RM401MUT-E/TR

RAV-SM457MUT-E/TR
RAV-RM561MUT-E/TR

SDI



DI



OUTDOOR UNITS

RAV-SP404ATP-E/TR
RAV-SP454ATP-E/TR
RAV-SP564ATP-E/TR

RAV-SM304ATP-E/TR
RAV-SM404ATP-E/TR
RAV-SM564ATP-E/TR



REMOTE CONTROLS

RBC-AX32UM(W)-E
TCB-AX32E2

RBC-AMS55E-ES(EN)
RBC-ASM41E
RBC-AMT32E
RBC-AS41E

COMPACT 4-WAY CASSETTE Performance data with Super Digital Inverter Series 4

Outdoor unit			RAV-SP404ATP-E/TR	RAV-SP454ATP-E/TR	RAV-SP564ATP-E/TR
Indoor unit (600X600 Cassette)			RAV-RM401MUT-E/TR	RAV-SM457MUT-E/TR	RAV-RM561MUT-E/TR
Cooling capacity	kW		3.6	4.0	5.0
Cooling range (min. - max.)	kW		1.5 - 4.0	1.5 - 4.5	1.2 - 5.6
Power input (min. - rated - max.)	kW	C	0.36 - 1.00 - 1.49	0.36 - 1.19 - 1.49	0.21 - 1.56 - 2.29
EER			3.61	3.37	3.22
SEER			5.39	5.31	5.62
Energy efficiency class		C	A	A	A+
Seasonal electricity consumption	kWh/a	C			
Heating capacity	kW		4.0	4.5	5.6
Heating range (min. - max.)	kW		1.5 - 5.0	1.5 - 5.6	0.9 - 7.4
Power input (min. - rated - max.)	kW	H	0.36 - 0.97 - 2.20	0.36 - 1.16 - 2.30	0.17 - 1.54 - 2.37
COP	W/W		4.13	3.89	3.65
SCOP			4.18	4.18	4.21
Energy efficiency class		H	A+	A+	A+
Seasonal electricity consumption	kWh/a	H			

COMPACT 4-WAY CASSETTE Performance data with Digital Inverter Series 4

Outdoor unit			RAV-SM304ATP-E/TR	RAV-SM404ATP-E/TR	RAV-SM564ATP-E/TR
Indoor unit (600X600 Cassette)			RAV-RM301MUT-E/TR	RAV-RM401MUT-E/TR	RAV-RM561MUT-E/TR
Cooling capacity	kW		2.5	3.6	5.0
Cooling range (min. - max.)	kW		0.9 - 3.0	0.9 - 4.0	1.5 - 5.6
Power input (min. - rated - max.)	kW	C	0.25 - 0.59 - 0.82	0.18 - 0.90 - 2.00	0.30 - 1.65 - 1.86
EER			4.25	4.01	3.04
SEER			5.54	5.36	5.49
Energy efficiency class		C	A	A	A
Seasonal electricity consumption	kWh/a	C			
Heating capacity	kW		3.4	4.0	5.3
Heating range (min. - max.)	kW		0.8 - 4.5	0.8 - 5.0	1.5 - 6.3
Power input (min. - rated - max.)	kW	H	0.17 - 0.76 - 1.40	0.14 - 0.95 - 1.70	0.30 - 1.52 - 2.40
COP	W/W		4.48	4.22	3.50
SCOP			4.28	4.28	4.17
Energy efficiency class		H	A+	A+	A+
Seasonal electricity consumption	kWh/a	H			

COMPACT 4-WAY CASSETTE Physical data indoor

Indoor unit		RAV-RM301MUT-E/TR	RAV-RM401MUT-E/TR	RAV-SM457MUT-E/TR	RAV-RM561MUT-E/TR
Air flow (H/L)	m ³ /h	640 (574/520/450/440)	660 (610/552/480/468)	660 (610/552/480/468)	798 (720/672/562/546)
Sound pressure level (H-M-L)	dB(A)	38 (37/36/31/30)	41 (38/36/33/32)	41 (38/36/33/32)	44 (42/39/36/35)
Sound power level (H-M-L)	dB(A)	53 (52/51/46/45)	56 (53/51/48/47)	56 (53/51/48/47)	59 (57/54/51/50)
Dimensions (HxWxD)	mm	256x575x575	256x575x575	256x575x575	256x575x575
Weight	kg	16	16	16	16
Panel dimensions (HxWxD)	mm	12 x 620 x 620	12 x 620 x 620	12 x 620 x 620	12 x 620 x 620
Panel weight	kg	3	3	3	3

C: cooling mode
H: heating mode
H-M-L = High - Medium - Low speed