

SDI - DI TWIN



Connect 2 indoors units on the same system to satisfy the cooling and heating requirements of larger area.

Comfort

- Precise air flow control, accurately controls the distribution of the air regardless of the room size.

Adaptability

- Twin configuration with up to 50m piping length
- Compatible with every type of LC indoor units: 4-way cassette, duct, high-wall and ceiling.

Control

- One user-friendly controller for all the indoor units to simplify the control.

SCOP MAX



5.05

CAPACITY



9.5kW > 14kW

OPERATION



-27°C > +52°C


Toshiba RAV simplistic piping design allows multiple indoor units to be connected via a simple branching methodology.



TWIN SYSTEM - 2 indoor units connected

Outdoor unit

Digital Inverter 4/5 HP
or
Super Digital Inverter 3/4/5 HP

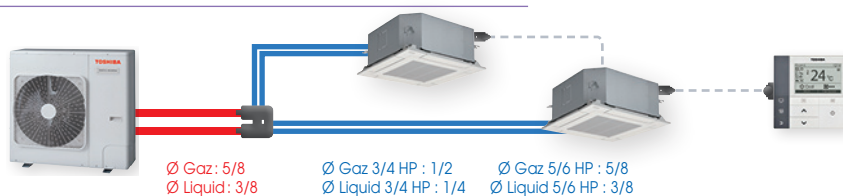

Total length < 50 m

Max pipe length < 15 m

Height difference < 30 m

Remote

RBC-AMS55E-ES



CASSETTE



DUCTED



CEILING

RAV-GM_UT-E/TR
RAV-RM_UTP-E/TR
RAV-RM_MUT-E/TR

RAV-RM_BTP-E/TR
RAV-RM_SDT-E/TR

RAV-RM_CTP-E/TR



OUTDOOR UNITS



RAV-GM1101AT(8)P-E/TR
RAV-GM1401AT(8)P-E/TR



REMOTE CONTROLS

RBC-AMS55E-ES(EN)
RBC-AMS41E
RBC-AMT32E
RBC-AS41E

TWIN SDI



Cooling & heating

Indoor unit model	Outdoor unit RAV-	Indoor unit RAV-	HP	Cooling capacity nin. - nominal - max kW	Heating capacity nin. - nominal - max kW	EER	SEER	COP	SCOP	Energy class
Smart 4-way cassette	GP1101AT-E	GM561UT-E	4	3.1 - 10 - 12.0	2.6 - 11.2 - 13.0	5.26	8.64	5.14	5.00	A++/A++
	GP1401AT-E	GM801UT-E	5	3.1 - 12.5 - 14.0	2.6 - 14 - 16.5	4.3	8.19	4.61	4.97	-/-
4-way cassette	GP1101AT-E	RM561UTP-E	4	3.1 - 10.0 - 12.0	2.6 - 11.2 - 13.0	4.69	8.57	4.79	4.73	A++/A++
	GP1401AT-E	RM801UTP-E	5	3.1 - 12.5 - 14.0	2.6 - 14.0 - 16.5	3.96	8.14	4.36	4.72	-/-
Compact 4-way cassette	GP801AT-E	RM401MUT-E	3	1.9 - 7.1 - 8.0	1.3 - 8.0 - 11.3	4.10	7.8	4.40	4.86	A++/A++
	GP1101AT-E	RM561MUT-E	4	3.1 - 10.0 - 12.0	2.6 - 11.2 - 13.0	4.18	7.7	4.19	4.4	A++/A+
Ducted	GP1101AT-E	RM561BTP-E	4	3.1 - 10.0 - 12.0	2.6 - 11.2 - 13.0	4.17	6.74	4.10	4.26	A++/A+
	GP1401AT-E	RM801BTP-E	5	3.1 - 12.5 - 14.0	2.6 - 14.0 - 16.5	3.50	6.27	3.86	4.25	-/-
Slim duct	GP801AT-E	RM401SDT-E	3	1.9 - 7.1 - 8.0	1.3 - 8.0 - 11.3	3.80	6.5	4.40	4.51	A++/A+
	GP1101AT-E	RM561SDT-E	4	3.1 - 10.0 - 12.0	2.6 - 11.2 - 13.0	3.91	6.65	4.19	4.00	A++/A+
Ceiling	GP801AT-E	RM401CTP-E	3	1.9 - 7.1 - 8.0	1.3 - 8.0 - 11.3	4.44	7.82	4.44	5.05	A++/A++
	GP1101AT-E	RM561CTP-E	4	3.1 - 10.0 - 12.0	2.6 - 11.2 - 13.0	4.48	7.97	4.71	4.71	A++/A++
	GP1401AT-E	RM801CTP-E	5	3.1 - 12.5 - 14.0	2.6 - 14.0 - 16.5	3.49	7.34	3.90	4.7	-/-

TWIN DI



Cooling & heating

Indoor unit model	Outdoor unit RAV-	Indoor unit RAV-	HP	Cooling capacity nin. - nominal - max kW	Heating capacity nin. - nominal - max kW	EER	SEER	COP	SCOP	Energy class
4-way cassette	GM1101ATP-E	RM561UTP-E	4	3.0 - 9.5 - 11.2	3.0 - 11.2 - 13.0	3.31	5.72	3.82	4.28	A+/A+
	GM1101AT8P-E	RM561UTP-E	4	3.0 - 9.5 - 11.2	3.0 - 11.2 - 13.0	3.31	5.72	3.82	4.28	A+/A+
	GM1401ATP-E	RM801UTP-E	5	3.0 - 12.0 - 13.2	3.0 - 12.8 - 16.0	2.80	5.25	3.76	4.19	A/A+
	GM1401AT8P-E	RM801UTP-E	5	3.0 - 12.0 - 13.2	3.0 - 12.8 - 16.0	2.80	5.25	3.76	4.19	A/A+
Compact 4-way cassette	GM1101ATP-E	RM561MUT-E	4	3.0 - 9.5 - 11.2	3.0 - 11.2 - 13.0	3.16	5.04	3.75	4.17	B/A+
	GM1101AT8P-E	RM561MUT-E	4	3.0 - 9.5 - 11.2	3.0 - 11.2 - 13.0	3.16	5.04	3.75	4.17	B/A+
Ducted	GM1101ATP-E	RM561BTP-E	4	3.0 - 9.5 - 11.2	3.0 - 11.2 - 12.5	3.18	5.1	3.75	4.14	A/A+
	GM1101AT8P-E	RM561BTP-E	4	3.0 - 9.5 - 11.2	3.0 - 11.2 - 12.5	3.18	5.1	3.75	4.14	A/A+
	GM1401ATP-E	RM801BTP-E	5	3.0 - 12.1 - 13.2	3.0 - 12.8 - 16.0	2.74	-	3.61	-	-/-
	GM1401AT8P-E	RM801BTP-E	5	3.0 - 12.1 - 13.2	3.0 - 12.8 - 16.0	2.74	-	3.61	-	-/-
Slim duct	GM1101ATP-E	RM561SDT-E	4	3.0 - 9.5 - 11.2	3.0 - 11.2 - 12.5	3.14	5.09	3.75	4.16	B/A+
	GM1101AT8P-E	RM561SDT-E	4	3.0 - 9.5 - 11.2	3.0 - 11.2 - 12.5	3.14	5.09	3.75	4.16	B/A+
Ceiling	GM1101ATP-E	RM561CTP-E	4	3.0 - 9.5 - 11.2	3.0 - 11.2 - 12.5	3.22	5.7	3.81	4.27	A+/A+
	GM1101AT8P-E	RM561CTP-E	4	3.0 - 9.5 - 11.2	3.0 - 11.2 - 12.5	3.22	5.7	3.81	4.27	A+/A+
	GM1401ATP-E	RM801CTP-E	5	3.0 - 12.1 - 13.2	3.0 - 12.8 - 16.0	2.74	-	3.73	-	-/-
	GM1401AT8P-E	RM801CTP-E	5	3.0 - 12.1 - 13.2	3.0 - 12.8 - 16.0	2.74	-	3.73	-	-/-

LIGHT COMMERCIAL